



QuoteID: 230099 Date: 11/9/2011 Customer PO:

Customer Number: 31372 Fab Status: PRODUCTION Req Ship Date:

<p>Account/Billing Information: L T H STEEL STRUCTURES ** LARRY HARVEY 1184 COUNTY LINE ROAD CUMMING, GA 30040-5410 Email: Larry@lthsteelstructures.com Phone: (770) 781-8279 Fax: (678) 208-5613</p>	<p>Shipping Information: CUMMING, GA 30040 County: Forsyth</p>									
<p>End User Information:</p>										
<p>Alternate Contact Information:</p>										
<p>Project Name:</p>										
<p>Engineering Design Info:</p> <p style="text-align: center;">Building Type: Gabled Building Width: 30' Length: 40' Height: 10' Slope: 3:12 Sidewall Bay Config: 2 bays at 20 ft Left Endwall: Non-expandable Bearing Frame Right Endwall: Non-expandable Bearing Frame LEW Column Spacing: 8 / 14 / 8 REW Column Spacing: 8 / 14 / 8 LEW Girt: Flush REW Girt: Flush FSW Girt: Bypass BSW Girt: Bypass Column Shape: Straight Code: IBC 2009 Wind Load: 90 Exposure: C Live Load: 20 Reducible: Yes Ground Snow: 5 Roof Snow: 4 Seismic: Ss = 0.268 S1 = 0.093 Seismic Coefficient: 0.42 Collateral Load: 0.5 Snow Factors: Is = 1.0 Ct = 1.0 Ce = 1.0</p> <p style="text-align: center;">Occupancy = Normal Thermal Conditions = Normally Heated/All Others Snow Exposure = All Other Roof/Terrain Conditions Roof Dead Load = 2 psf</p>										
<p>Building Colors:</p> <p style="text-align: center;">Wall: Ash Gray (26 Gauge PBR) Roof: Galvalume Plus (26 Gauge PBR) Eave Trim: Ash Gray Downspout: N/A Corner Trim: Ash Gray Jamb/Header Trim: Ash Gray</p>										
<p>Doors & Factory Located Framed Opening Summary:</p> <p>Size: 10X10 Wall: Left Endwall Bay: B Align: 2 ft from left column \$205.33 ----No door selected for this framed opening----door provided by others.</p>										
<p>Building Accessories:</p> <table style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;"><u>Description</u></th> <th style="text-align: center;"><u>Selected</u></th> <th style="text-align: right;"><u>Price</u></th> </tr> </thead> <tbody> <tr> <td>Gutters and Downspouts</td> <td style="text-align: center;">No</td> <td style="text-align: right;">\$0.00</td> </tr> <tr> <td>Framed Opening Jamb Flashing</td> <td style="text-align: center;">No</td> <td style="text-align: right;">\$0.00</td> </tr> </tbody> </table>		<u>Description</u>	<u>Selected</u>	<u>Price</u>	Gutters and Downspouts	No	\$0.00	Framed Opening Jamb Flashing	No	\$0.00
<u>Description</u>	<u>Selected</u>	<u>Price</u>								
Gutters and Downspouts	No	\$0.00								
Framed Opening Jamb Flashing	No	\$0.00								

Base Closures	No	\$0.00
Standard Base Angle		\$0.00

Roof Extensions:
 ----No Roof Extensions Selected----

Liner Panel:
 ----No Liner Panel Selected----

Other Accessories:

Description	Qty	Color	Price
Doors Type M 3070 (Non-Windrated) (3ft X 7ft)	1	White	\$320.76
Swing Option: Left Handed			
Option: Non-Insulated			\$0.00
Lock Option: Standard Duty Knob Lock			\$28.14

Misc Framed Openings:
 ----No Misc Framed Openings Selected-----

Insulation:
 ----No Insulation Selected-----

Wall Fastener Type: Standard Length: 1 1/4"	\$0.00
Roof Fastener Type: Long Life Length: 1 1/4"	\$0.00

Total Price Summary:

Base Building Price:	\$7,951.12
Building Freight:	\$900.00
Framed Opening Add:	\$205.33
Total Accessories Price (including fasteners, accessories):	\$348.90
Stamped with Design Calculations Overnight Service	\$225.00
Tax:	To Be Added
Total Price (FOB seller's facility with freight allowed):	\$9,630.35
Estimated Weight:	6608 lbs

TERMS OF PAYMENT: 30 % DEPOSIT REQUIRED FOR ENGINEERING, FABRICATION AND DELIVERY SCHEDULES. BALANCE TO BE PAID BY BANK CASHIERS CHECK ON DELIVERY.

ACCEPTANCE OF ORDER _____ DATE _____

Notes:

- Foundation: **Anchor bolts** by others
- Unless otherwise noted, the following specifications and conditions apply:
- All paneling incorporates the purlin-bearing profile
- Price includes long-life roof fasteners (lifetime red-rust warranty)
- The pre-punched connecting clips for the structural elements, including endwall columns, are welded in place and then primed during fabrication
- Buildings are engineered to meet listed codes and loads with the specified factory-located framed openings (size, location, and materials taken into account)
- All structural elements for the specified framed openings (girts, jamps, and headers) are pre-cut and pre-punched and the necessary clips are welded on during fabrication
- Whenever possible, paneling is pre-cut to accommodate the specified factory-located openings (some panels may require cutting in the field)

Design Disclosures:Soil Profile

Jobsite soil properties meeting the requirements of a Stiff Soil Profile have been assumed in the determination of Seismic design values. If you have questions concerning the particular conditions at your jobsite, this information should be verified by your Foundation Engineer or local Building Permit authority.





Enclosure

You have ordered this building to be designed as an enclosed structure. This means that all exterior components, including those not supplied by the manufacturer, **MUST** be designed for full wind load. This will require the installation of walk doors, roll-up and overhead doors, and windows rated to the wind expressed on the metal building drawings. Furthermore, these items must be installed in strict accordance with the manufacturer's instructions.

It is also possible that exterior components of the building, such as all doors and windows, must be constructed using projectile resistant materials. Consult your local building department for more information. Failure to comply with these requirements may create a situation endangering the lives of the inhabitants, or resulting in property damage. **THE MANUFACTURER OF THE METAL BUILDING SYSTEM CANNOT BE HELD RESPONSIBLE FOR THIS IN ANY WAY.**

This quote is still current. The price is subject to change at anytime without notice.
To lock this price buy now.

Note: If a price increase occurs, this quote will need to be re-priced.

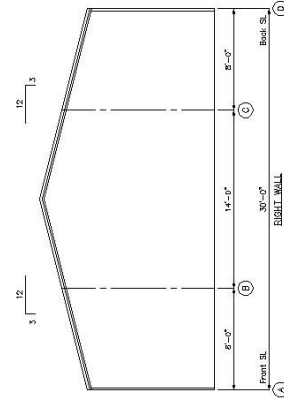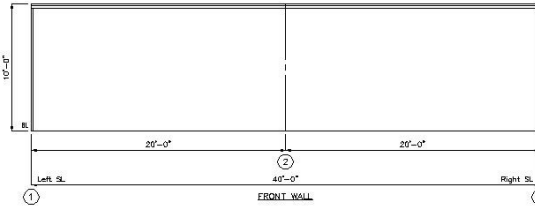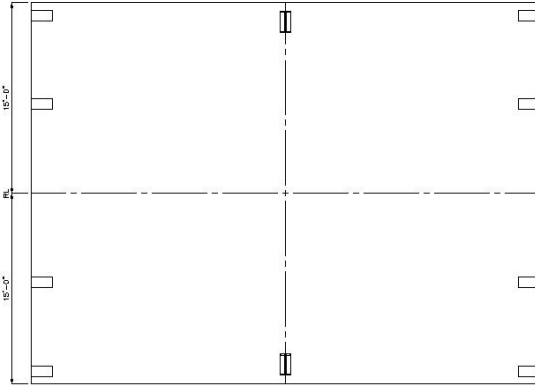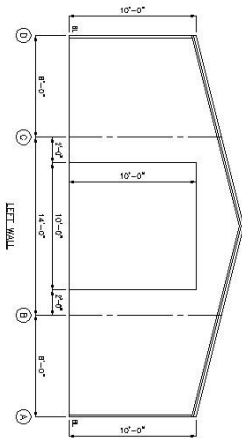

LEGEND: SL - Stud Line; CL - Base Line; RL - Ribs Line

COVERING		
SURFACE	GRADE	COVERING TYPE
FLOOR	SL	Asph Strcp
FRONT WALL	SL	Asph Strcp
BACK WALL	SL	Asph Strcp
LEFT WALL	SL	Asph Strcp
RIGHT WALL	SL	Asph Strcp